CLOUDUPPER

东莞市亿彩电子科技有限公司

产品规格书

SPECIFICATION

客户名称customer name：	
客户编码Customer No.	
产品类型Product Name ：	反射式光电开关
产品型号 Part No.：	YC1502TR
版本 Version：	V1.2
发布日期 Date:	2022-3-25

客户承认 APPROVED BY CUSTOMER			亿彩承认 APPROVED BY CLOUDUPPER		
确认意见 COMMENTS	审核 CHECKED BY	批准 APPROVED BY	编写 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY
			丁煜城	钟永成	田勇
判定: Judge outcome:			判定: Judge outcome:	OK	

联系电话（Tel）：0769-82887096　　手机（Mob）：18822950219（微信同号）

邮箱（Email）：yicai@irsenor.com　　yicai@chumokuang.com

网站(Web)：www.irsenor.com　　www.chumokuang.com　　www.cloudupper.cn

地址（Add）：广东省东莞市虎门镇沙角富民路11号

Address: No.11, Shajiao Fumin Road, Humen Town, Dongguan City, Guangdong Province

本规格书仅用于双方交流用需经双方签订后方可生效，自签订后有效期为两年，期满后需以书面形式续签。最终解释 权为亿彩所有。

This product specification is only used for technical communication.Only after the signature or seal, the specifications have the force of law.since the signing of the validity period of two years, after the expiration of the written renewal. The final interpretation right is owned by the CLOUDUPPER

反射式光电开关
Optical Senor Reflective

YC1502TR



Features

--High sensitivity
--Cut-Off visible wavelength
--Compliance Halogen Free(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)--Compliance with EU REACH
--This product itself will remain within RoHS compliant version.
--Optimal Sensing Distance:4 mm
--Packagesize: 4.0*3.0*2.0 mm

Description

--YC1502TRs a compact-package, phototransistor output, reflective photo interrupter, with emitter anddetector facing the same direction in a molding that provides non-contact sensing. The compact packageseries is a result of unique technology, combing transfer and injection molding, that also blocks visible light tominimize false detection. This device has a long focal distance for this family of devices and has a leadless (T&R) package, suitable for reflow soldering.

Applications

--Detection of object presence or motion.
--Example : printer, optical storage, Projector

Device Selection Guide

Device No.	Chip Material	Lens Color
IR	GaAs	Black clear
PT	Silicon	Black clear

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

电话(Tel)：0769-82887096　　邮箱（Email）：yicai@irsenor.com　　网站(Web)：www.irsenor.com

Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25 ℃ Free Air Temperature	Pd	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current (*1) Pulse width ≦100μs, Duty cycle=1%	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	75	mW
	Collector Current	I_C	25	mA
	Collector-Emitter Voltage	B V_{CEO}	30	V
	Emitter-Collector Voltage	B V_{ECO}	5	V
Operating Temperature		Topr	-25~+85	℃
Storage Temperature		Tstg	-40~+100	℃
Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds)		Tsol	260	℃

- Notes:
  (*1) tw=100 μsec., T=10 msec.
  (*2) t=10 Sec

Electro-Optical Characteristics (Ta=25℃)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	V_F	-	1.2	1.4	V	I_F=20mA
	Reverse Current	I_R	-	-	10	μA	V_R=6V
	Peak Wavelength	λ_P	-	940	-	nm	I_F=10mA
Output	Dark Current	I_{CEO}	-	1	100	nA	V_{CE}=20V
Transfer Characteristics	Collect Current	I_C(ON)	60	-	450	μA	V_{CE}=2V I_F=4mA d=4mm
		I_C(OFF)	-	-	600	nA	V_{CE}=2V I_F=4mA
	Response time	tr	-	20	100	μs	V_{CE}=2V, I_C=100μA, RL=1kΩ, d=4mm
		tf	-	20	100	μs	


*Operating dark current may be affected by surrounding situation

Bin Range of Collect Current

Bin number	Min	Max
A	60	120
B	100	220
C	180	350
D	310	450

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

*产品尺寸 Package Dimension

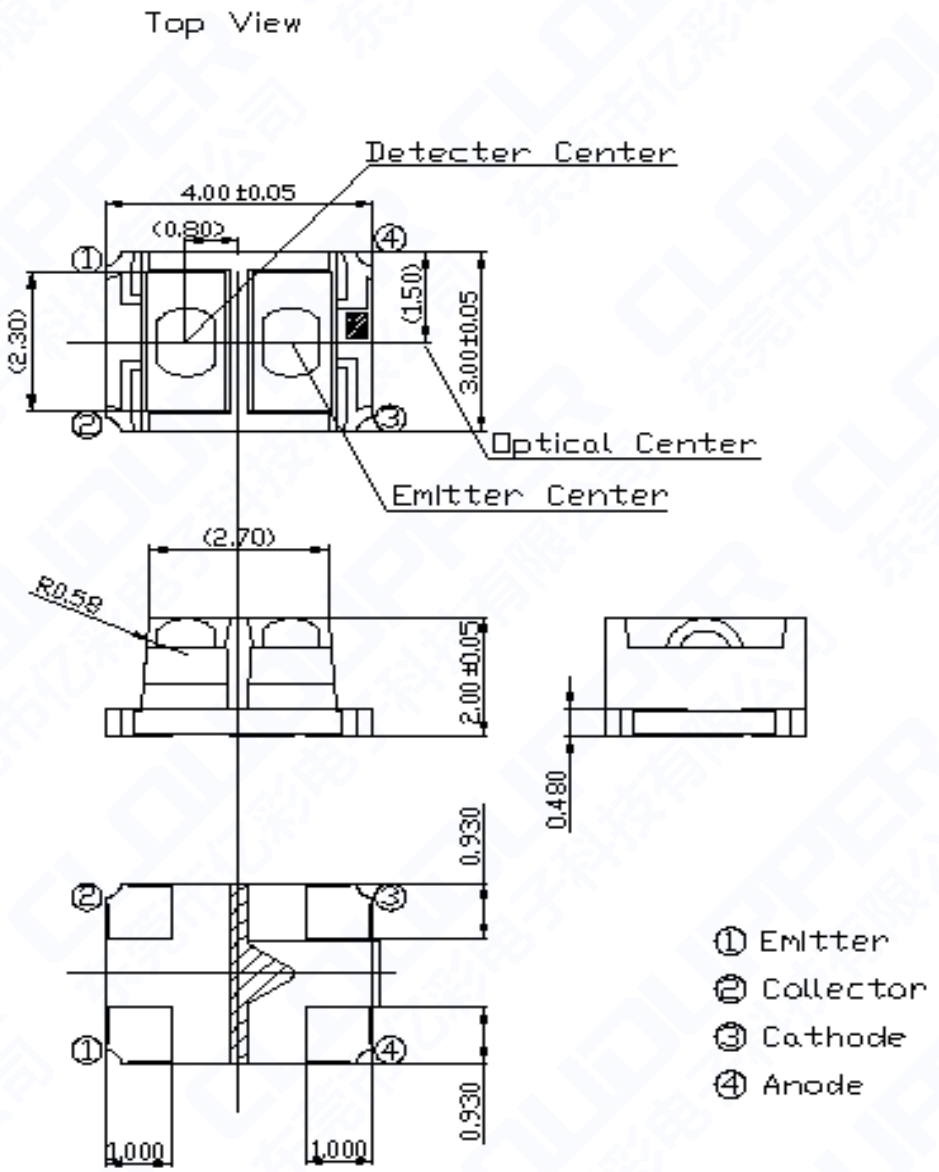

--Notes:

1.All dimensions are in millimeters
2.Tolerances unless dimensions ±0.1mm
3.Lead spacing is measured where the lead emerge from the package4
.Product mass : approx. 0.025g

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25 ℃ Free Air Temperature	Pd	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current (*1) Pulse width ≦100μs, Duty cycle=1%	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	75	mW
	Collector Current	I_C	25	mA
	Collector-Emitter Voltage	B V_{CEO}	30	V
	Emitter-Collector Voltage	B V_{ECO}	5	V
Operating Temperature		Topr	-25~+85	℃
Storage Temperature		Tstg	-40~+100	℃
Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds)		Tsol	260	℃

- Notes:
  (*1) tw=100 μsec., T=10 msec.
  (*2) t=10 Sec

Electro-Optical Characteristics (Ta=25℃)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	V_F	-	1.2	1.4	V	I_F=20mA
	Reverse Current	I_R	-	-	10	μA	V_R=6V
	Peak Wavelength	λ_P	-	940	-	nm	I_F=10mA
Output	Dark Current	I_{CEO}	-	1	100	nA	V_{CE}=20V
Transfer Characteristics	Collect Current	I_C(ON)	60	-	450	μA	V_{CE}=2V I_F=4mA d=4mm
		I_C(OFF)	-	-	600	nA	V_{CE}=2V I_F=4mA
	Response time	tr	-	20	100	μs	V_{CE}=2V, I_C=100μA, RL=1kΩ, d=4mm
		tf	-	20	100	μs	


*Operating dark current may be affected by surrounding situation

Bin Range of Collect Current

Bin number	Min	Max
A	60	120
B	100	220
C	180	350
D	310	450


Copyright © 2022, Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

Test Condition and Arrangement for Collector Current

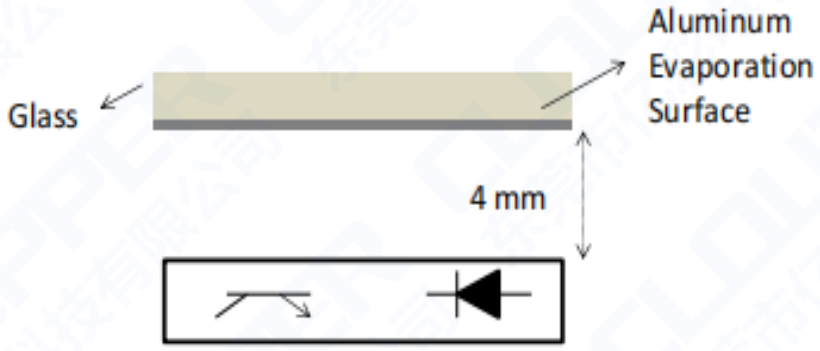


Typical Electro-Optical Characteristics Curves


Forward Current VS. Forward Voltage

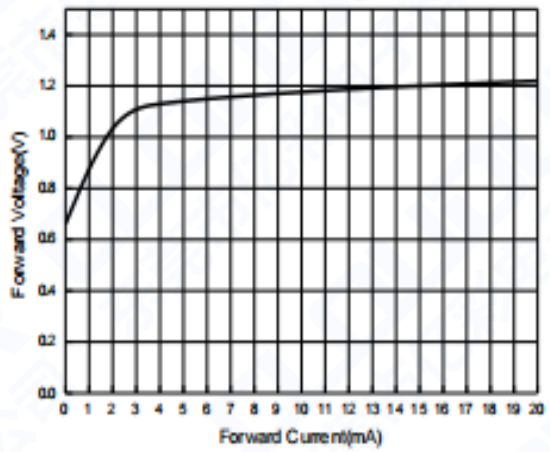


Forward Current V.S Collector Current

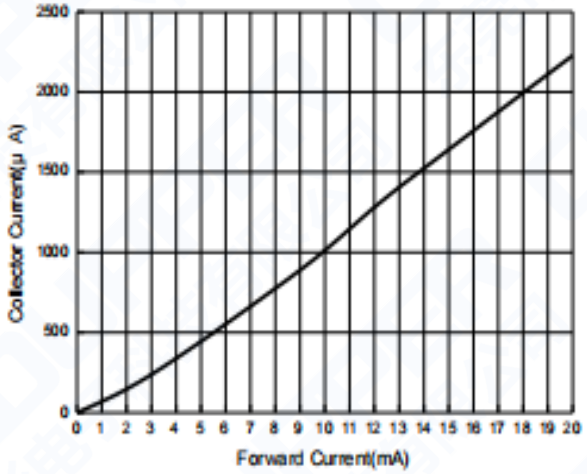

Collector Current V.S Collector-Emitter Voltage

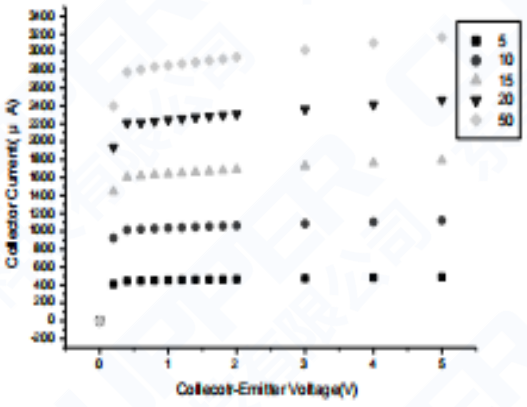


Forward Voltage V.S Ambient Temperature

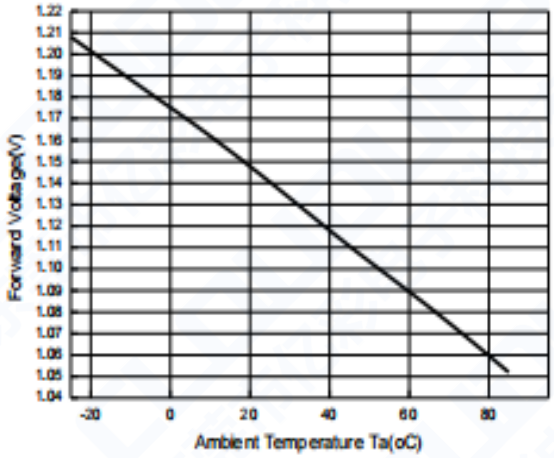


Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2


Relative Collector Current V.S Ambient Temperature

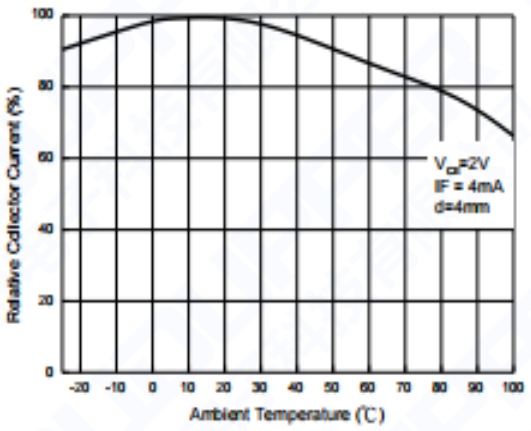


Relative Collector Current V.S Z-Moving Distance
Condition : I_F=4 mA 、V_{CE}=2 V

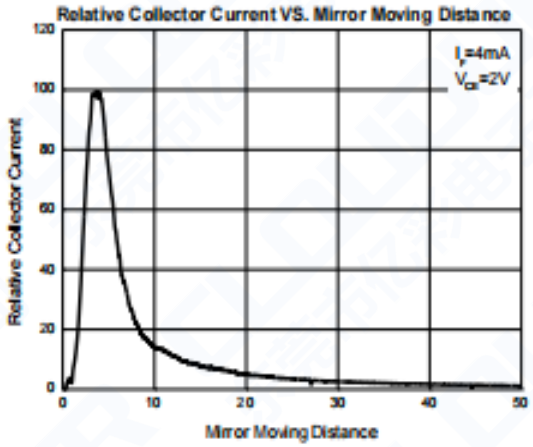


Forward Current V.S Ambient Temperature

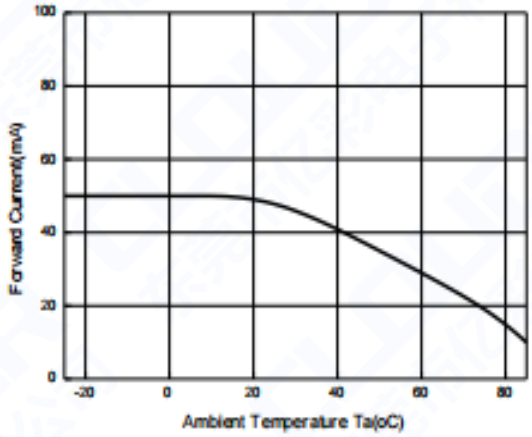


Power Dissipation vs. Ambient Temperature

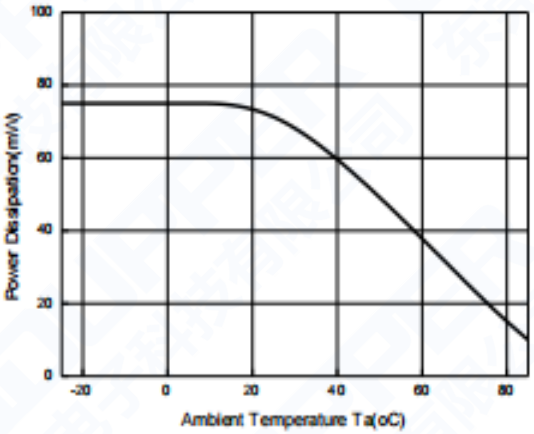

Collector Dark Current vs. Ambient Temperature

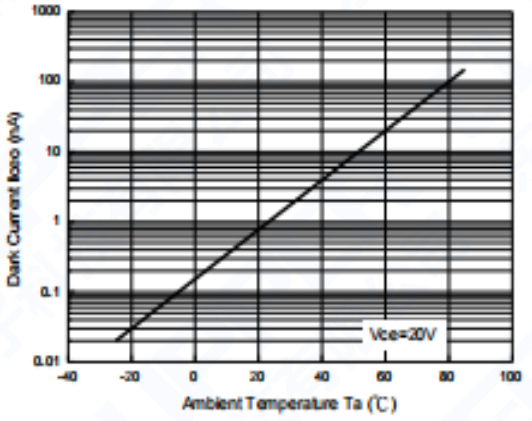



Wave length

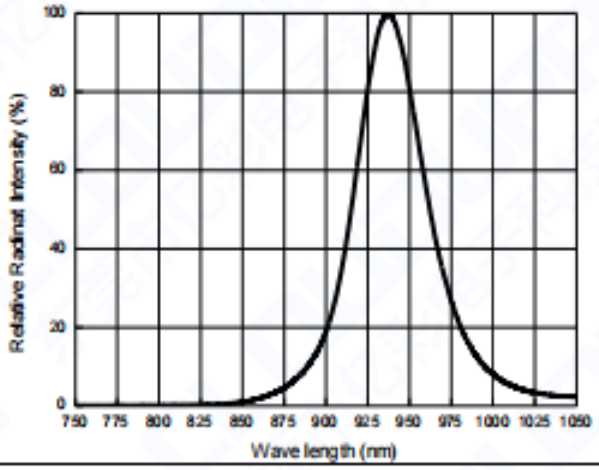


Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

Measuring Circuit For Response Time

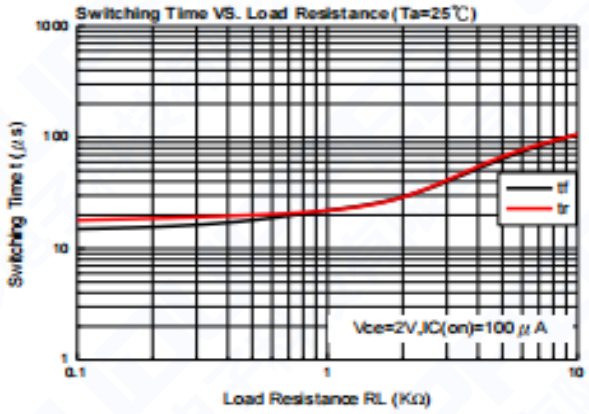


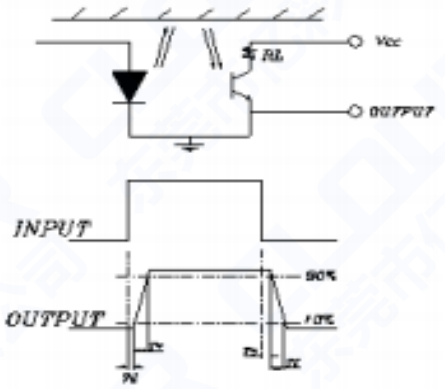

Test Condition and Arrangement for Collector Current

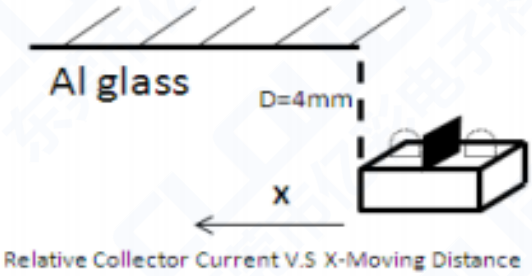


Relative Collector Current V.S X-Moving Distance

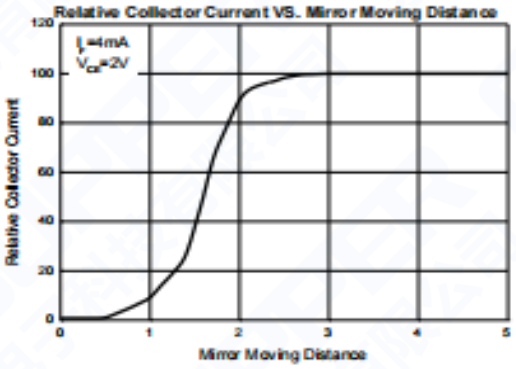





Relative Collector Current V.S Y-Moving Distance

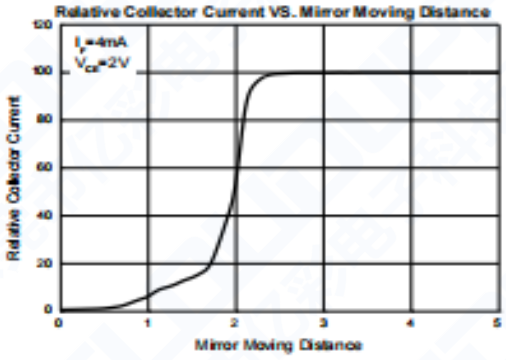


Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

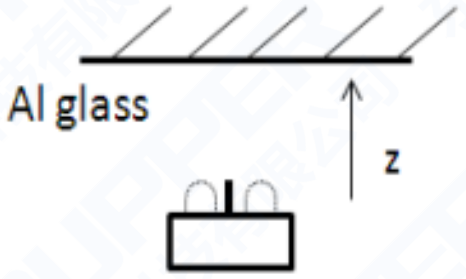

Relative Collector Current V.S z-Moving Distance

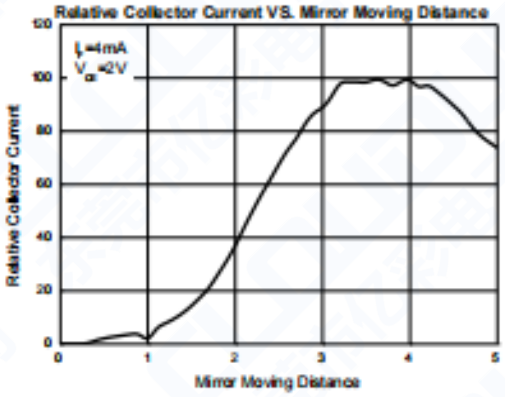

Recommended pattern




area : Please do not apply the pattern wiring to avoid the possibility of short circuit.

Regarding amount of solder, if there is solder leakage in terminal wiring pattern between PCB and housing main body, the reliability will be deteriorated.

Please check the proper amount of solder in advance not to have solder leakage into terminal wiring pattern between PCB and housing main body.


Package specification

- Tape and Reel package

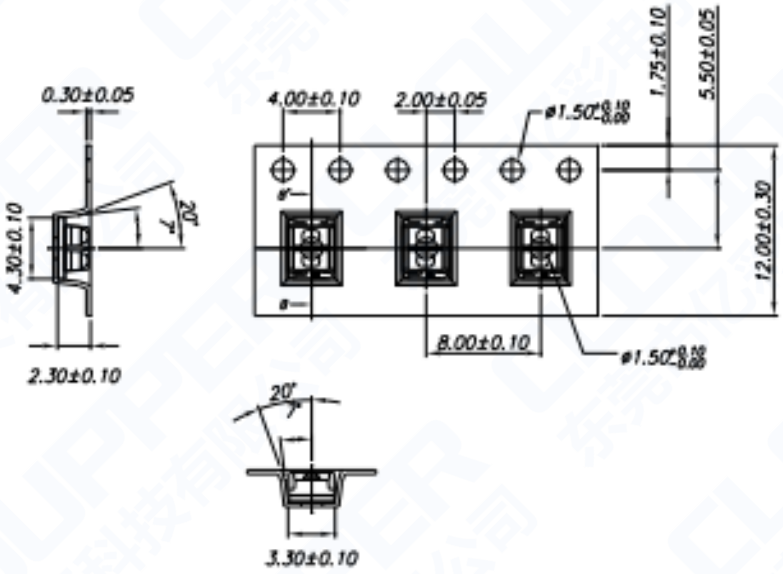

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

Reel Dimensions

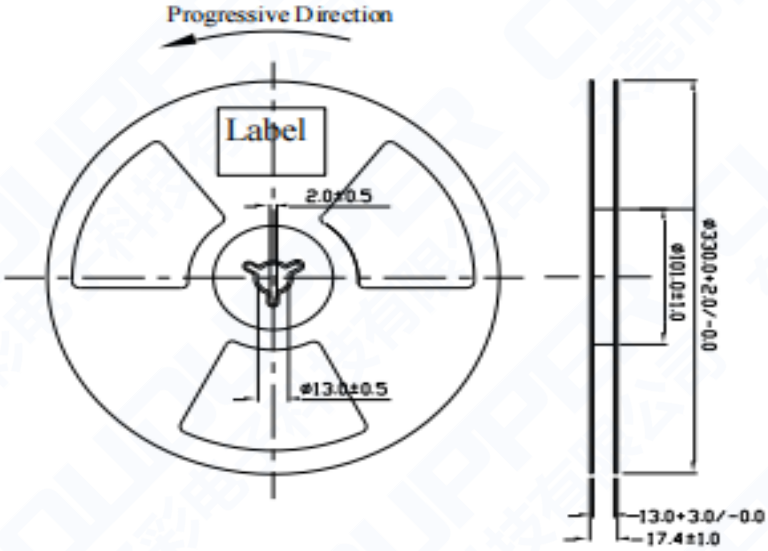

Note: The tolerances unless mentioned is ±1.0mm ,Unit = mm


Packing Quantity Specification

- 800pcs / 1 Reel
- 38 Reels / 1 Carton

Packing Procedure



Outer Carton Dimension : 409mm(A)*245mm(B)*360mm(C)

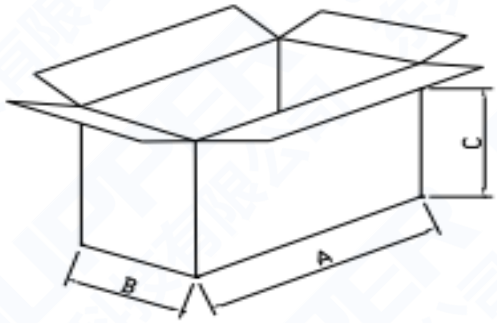

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

Recommended Method of Storage

The following are general recommendations for moisture sensitive level (MSL) 3 storage and use：

1. Storage

1.1 Do not open moisture proof bag before the products are ready to use.

1.2 Before opening the package, the device should be kept at 30℃ or less and 90%RH or less.

1.3 The device should be used within a year.

1.4 After opening the package, the device should be kept at 30℃ or less and 70%RH or less.


1.5 The device should be used within 168 hours (7 days) after opening the package.

1.6 If the moisture absorbent material (silica gel) has faded away or the device have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5℃ for 24 hours.

2. Soldering Condition

a) Pb-free solder temperature profile

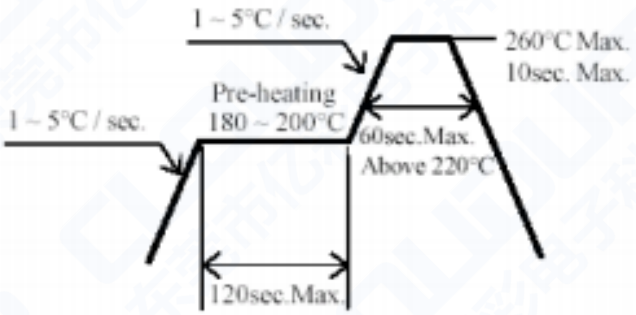

b) Reflow soldering should not be done more than two times.


c) When soldering, do not put stress on the LEDs during heating.

d) After soldering, do not warp the circuit board.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2

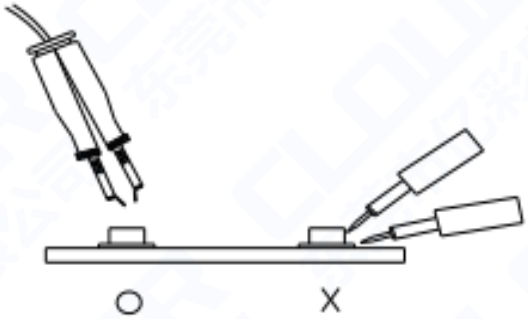

--其他 （Other）

1 、以上规格可更改，恕不另行通知。 亿彩电子将为上述规格的材料变更保留权力 Above specification may be changed without notice. CLOUD UPPER will reserve authority on material change for the above specification.

2 、当使用此产品时，请观察这些规格表中概述的绝对最大额定值和使用说明。亿彩电子不承担任何损坏结果的责任从不符合绝对最大额定值的产品的使用和这些规格表中包含的说明 When using this product, please Observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. CLOUD UPPER assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

3 、此规格书版权属东莞市亿彩电子科技有限公司。未经允许不得转载或复印。These specification sheets include materials protected under copyright of CLOUDUPPER Corporation. Please don't reproduce or cause anyone to reproduce them without CLOUDUPPER 's consent.

Copyright © 2022，Cloudupper All Rights Reserved. Release Date: 2022/03/25.. Issue No: V1 Rev2